



STA-RITE TRX

SAND FILTER

The improved version of the Industry standard.



FEATURES

- One piece, fiberglass reinforced tank with UV resistant coating
- Pre-assembled ABS 6-way valve
- Re-inforced inner pipes & adaptor rings
- Available with ClearPro Technology® and Provalve

Available with ClearPro Technology®




TECHNICAL FEATURES & PRICE

Part number		Diameter Ø	Filter area	Flow rate	Max pressure	Valve connection	Sand	Gravel	Clearance distance	Valve
Standard	ClearPro	(mm)	(m²)	(m³/h)	(bars)		(kg) 0.4 - 0.8 mm	(kg) 3- 5 mm	(mm)	
F-19S8-TRX	F-19S8-TRXCP	480	0.17	8.5	3.5	1.5"	50	25	825	6 way
F-24S8-TRX	F-24S8-TRXCP	610	0.29	14	3.5	1.5"	100	50	955	6 way
F-30S8-TRX	F-30S8-TRXCP	762	0.45	22	3.5	2"	200	75	1095	6 way
KIT-F-36S8-TRX	KIT-F-36S8-TRXCP	914	0.64	32	3.5	2"	300	100	1200	6 way

Valve included ⁽¹⁾ No gravel with Clearpro technology

DIMENSIONS

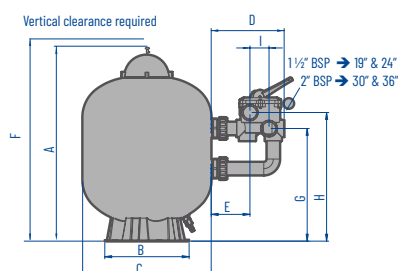

Part number	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)	G (mm)	H (mm)	I (mm)
F-19S8-TRX	785	400	Ø 480	252	120	876	463	524	70
F-24S8-TRX	915	400	Ø 610	252	120	1006	530	592	70
F-30S8-TRX	1055	610	Ø 762	302	160	1146	590	671	70
KIT-F-36S8-TRX	1160	610	Ø 914	302	160	1251	657	738	70

PACKAGING

Part number		Box				Palet			
Standard	ClearPro	Length (mm)	Width (mm)	Height (mm)	Poids (kg)	Length (mm)	Width (mm)	Height (mm)	Pce/Palet
F-19S8-TRX	F-19S8-TRXCP	49	49	88	13.4	98	98	189	8
F-24S8-TRX	F-24S8-TRXCP	63	63	102	18.4	126	126	218	8
F-30S8-TRX	F-30S8-TRXCP	78	78	120	29.8	156	80	134	2
KIT-F-36S8-TRX	KIT-F-36S8-TRXCP	94	94	106	35.5	95	95	220	2